

PS-SR225S Seismount Galvanised Steel – 225mm

INDUSTRY FIT: 

SPECIFICATIONS:

PANELSAFE PS RANGE

The PanelSafe Seismount in galvanised steel is a strong solution for high volume architectural installation where added security and control of the panel is required. The Seismount allows the panel to be suspended below the ceiling for convenient servicing behind the panel or controlled removal of the panel. Install with M10 pan head screw or 6.3 x 8mm euro screw. Simply unhook the strap from the screws to remove the panel.

Drop length 225mm. 144kg break load for the PS-SR225S in both wall and ceiling applications.

BENEFITS

- Low cost solution for high volume applications
- No special tools required for installation
- Install directly onto substrate face with screws
- Controlled removal of large panels
- Seismic security for overhead panels – prevents panels from falling

APPLICATIONS

- Ceiling panels
- Wall panels
- Large panels
- Inspection and service panels

PS-SR225S




USE WITH:

PC Standard Range,
LP Low Profile Range,
VL Very Low Profile Range,
MC Metal Range

MATERIAL:

Galvanised steel

INSTALLATION: Partially exploded through section showing typical installation method

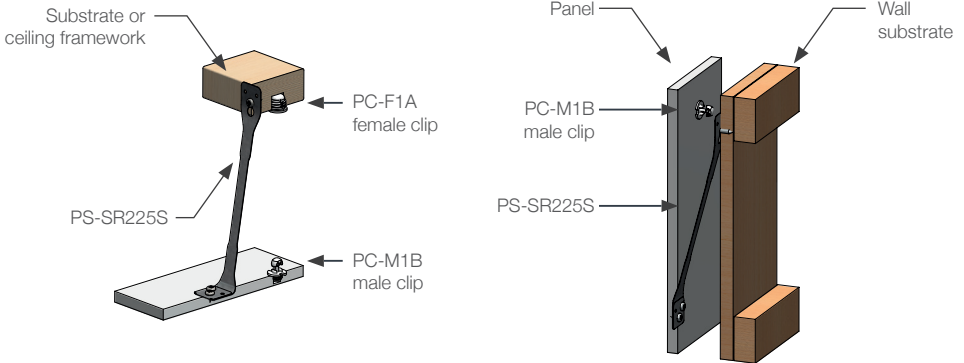

The Fastmount® multi-award winning system has revolutionized the mounting of panels. Panels can easily be removed and refitted in any sequence time after time. For further information or technical support contact: info@fastmount.com